

GS-506N-RA5C

5MP Indoor 4 in 1 Full color Dome Camera

High



●5MP

The GS-506N-RA5C 5MP Indoor 4 in 1 Full color Dome Camera provides high definition analog output. AHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

4PCS Warm LED provides a good interface and good effective for night vision.

The 2.8 mm lens is optimized for viewing angles that fit any situation. D-WDR (Digital-Wide Dynamic Range) and 2D-DNR ensure that ideal images are in good conditions for both day and night vision.

Performance CMOS


- Up to 2608*1952 Resolution
- AHD/TVI/CVI/CVBS 4 in 1 Output
- 2.8mm Lens
- 4PCS Warm LED
- Full color night vision
- Up-the-Coax (supports UTC)
- Supports 2D DNR/AWB/Exposure
- Metal+Plastic Housing
- IP66



Specifications

GS-506N-RA5C		
Camera		
Image Sensor	5.0 MP CMOS SOI K05	
Signal System	PAL/NTSC	
Effective Resolution	2608H*1952V	
Frame Rate	5mp @ 12.5 fps/20 fps	
Minimum Illumination	0.2lux, 0 lux with IR	
Shutter Speed	AUTO/ 1/50 (1/60) -1/50,000sec	
Lens	4 mm (2.8/6 mm optional)	
Horizontal Field of View	82.6° (3.6 mm), 54.4° (6 mm)	
Day/Night	Auto/color/BW (Black and White)	
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°	
WDR	D-WDR	
Menu		
AGC	Supported	
Day/Night Mode	Auto/Color/BW (Black and White)	
White Balance	AUTO/MANUAL	
Privacy Mask	ON/OFF, 8 programmable privacy masks	
Motion Detection	4 programmable motion areas	
Backlight Compensation	D-WDR/BLC/HLC/off	
2D and 3D DNR	On/off	
Voltage Detection	Supported	
Scene	Indoor/outdoor/hard light/low light	
Functions	Mirror, Defective pixel correction, Sharpness, Camera title	
Interface		
Video Output	1CH AHD/TVI/CVI/CVBS 4 in 1 Output	
General		
Operating Conditions	-4° F to 140° F (-20° C to 60° C), humidity: 90% or less (non-condensation)	
Power Supply	12V DC	
Power Consumption	Maximum: 6 W	
IR Range	Up to 65 ft (20 m)	
Protection Level	IP66	
Communication	Up-the-Coax	
Dimensions	176.5mm x 54.67 mm x 68 mm	
Weight	Approximately 0.35 kg	

Dimensions

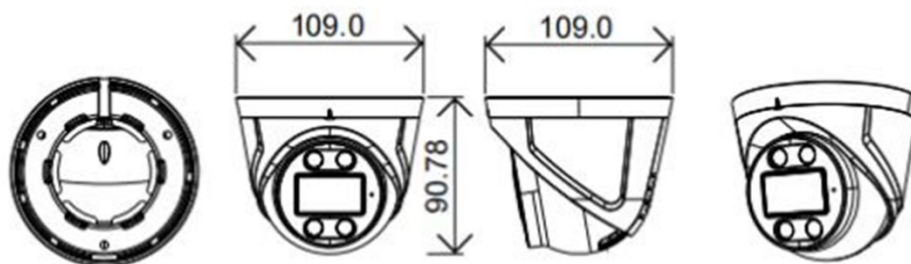

© SHENZHEN GRANDSECU TECHNOLOGY CO., LTD • All Rights Reserved • Specifications subject to change without notice.

Address: No.11 Xiantian Road, Xinsheng Community, Longgang District, Shenzhen, China 518116

Tel: +86-755-2851-0749 • E-Mail: info@grandsecu.cn • Website: www.grandsecu.cn

GRANDSECU[®]