

## GS-606N-RA2H 2MP Outdoor 4 in 1 Lite Bullet Camera



The GS-606N-RA2H 2MP Outdoor 4 in 1 Lite Bullet Camera provides high definition analog output. AHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

4PCS Warm LED provides a good interface and good effective for night vision.

The 4 mm lens is optimized for viewing angles that fit any situation. D-WDR (Digital-Wide Dynamic Range) and 3D-DNR ensure that ideal images are in good conditions for both day and night vision.

- 2MP High Performance CMOS
- Up to 1920\*1080 Resolution
- AHD/TVI/CVI/CVBS 4 in 1 Output
- 4 mm Lens
- 4PCS Warm LED
- Up-the-Coax (supports UTC)
- Supports 3D DNR/AWB/Exposure
- IP66




### Specifications

GS-606N-RA2H		
Camera		
	Image Sensor	2.0 MP FH8536H+F37P
	Signal System	PAL/NTSC
	Effective Resolution	1920H*1080V
	Frame Rate	2mp @ 20 fps
	Minimum Illumination	0.1lux, 0 lux with IR
	Shutter Speed	AUTO/ 1/50 (1/60) -1/50,000sec
	Lens	4 mm
	Horizontal Field of View	82.6° (3.6 mm), 54.4° (6 mm)
	Day/Night	Auto/color/BW (Black and White)
	Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°
		WDR                      D-WDR
Menu		
		AGC                      Supported
	Day/Night Mode	Auto/Color/BW (Black and White)
	White Balance	AUTO/MANUAL
	Privacy Mask	ON/OFF, 8 programmable privacy masks
	Motion Detection	4 programmable motion areas
	Backlight Compensation	D-WDR/BLC/HLC/off
	2D and 3D DNR	On/off
	Voltage Detection	Supported
	Scene	Indoor/outdoor/hard light/low light
	Functions	Mirror, Defective pixel correction, Sharpness, Camera title
Interface		
	Video Output	1CH AHD/TVI/CVI/CVBS 4 in 1 Output
General		
	Operating Conditions	-4° F to 140° F (-20° C to 60° C), humidity: 90% or less (non-condensation)
	Power Supply	12V DC
	Power Consumption	Maximum: 6 W
	IR Range	Up to 65 ft (20 m)
	Protection Level	IP66

Communication	Up-the-Coax
Dimensions	165 mm x 61mm x 58 mm
Weight	Approximately 0.35 kg

**Dimensions**

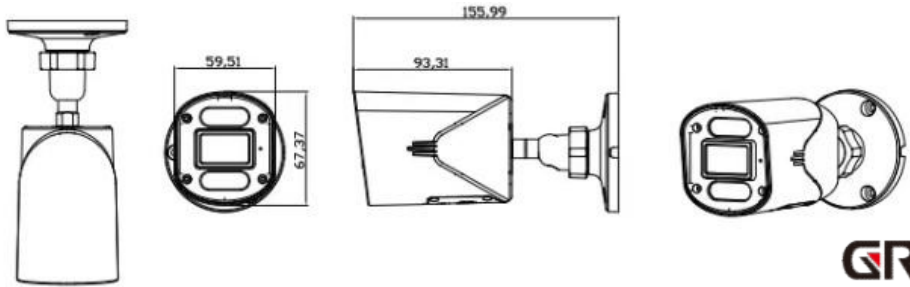

**GRANDSECU®**