

(5MP) P6SLite WiFi Bullet Cam




- 5.0MP FHD image sensor
- Cloud storage/128GB TF card storage
- WiFi Hotspot
- ONVIF 2.4/P6S Protocol for NVR connection
- Human Detection
- Smart dual light night vision
- Metal housing
- IP66 Weatherproof

3. Product Functions And Features:

- * support 6 kinds of polygon area arming function, while supporting a variety of alarm linkage (trigger mail/trigger FTP/trigger SD card capture, video/joint push/sound output) function.
- * support AP hot spot mode direct connection, no external network, suitable for no external network environment (such as construction sites, fish ponds, etc.).
- * support RJ45 function, cross-network segment automatic mapping function (with P6SLITE NVR), support WIFI module and external POE function, the default H.265 coding code rate is lower, image quality is clearer, less bandwidth, storage time is longer and lower cost, image picture is more smooth.
- * support cloud NVR and Easyvms clients for centralized management.
- * support ONVIF standard protocol and P6S private protocol, support TF card (FAT32 format, support 256GB) or mobile phone local storage video, can be compatible with a variety of TF cards on the market, support audio and video data FTP upload (via APP) free backup data.
- * APP supports gesture amplification, support for preset setup, support for up to 6 presets

4. Dimensions

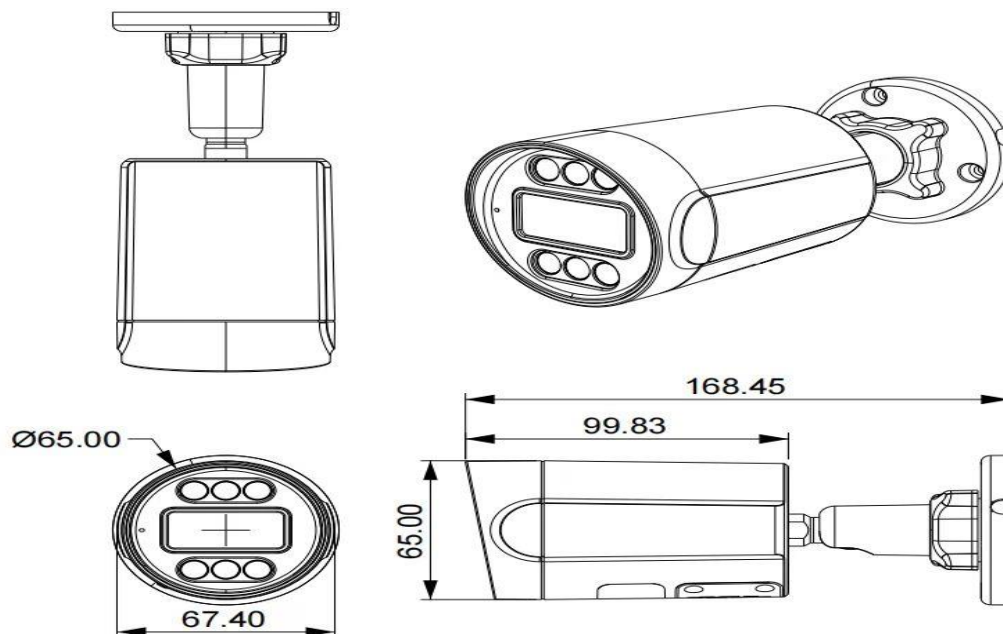

5.Product Technology Parameters :

products	Model	GS-K687-RN4I
system	Processor	W5
	operating system	Embedded LINUX operating system
Video	Sensor	1/2.7 CMOS Sensor
	Video coding standards	H.264/H.265
	System-based	PAL 50HZ/NTSC 60HZ
	Effective resolution	5MP (2560*1920)
	Resolution	5.0 M pixels
	Video frame rate	1-25fps (default is 25fps)

	Video stream	256kbps-12288kbps(Default variable code rate, customization supported) (APP)
	SNR	SNR≥69dB
	Minimum illumination	Day mode 1Lux, night vision mode 0.01Lux
	Day and night mode	Automatic (passive mode)/day/night/automatic (active mode)/timing
	AWB/3D noise reduction/AGC/Wide dynamic/Exposure time	AUTO
	Automatic Electronic Shutter (AES)	AUTO/ 1/25-1/10,000 second
	Video output	Easytool/EasyVMS client/mobile APP
	Mobile detection	support
	The capture function	support
Video management	Record	Manual recording, alarm recording, timing recording
	Save the video	TF card/PC/NVR
alarm	Alarm in/out	Supports alarm output
	Alarm trigger	Mobile detection alarms, speaker alarms, alarm recordings, screenshots, emails
Internet	Network protocols	HTTP,TCP/IP,IPV4,UPNP,RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPOE, DDNS, FTP,IP Search(Support P6S IP camera, DVR, NVS and etc.)
other	TF card capacity	Up to 256GB (universal FAT32 format)
	Operating voltage	Standard DC-12V (wide voltage 10-16V)
	The working environment	-10℃ --- +55℃
size	Dimensions	75mm*68mm*232mm*
	Weight	Approximately 0.7 kg