

## GS-X56-RW3D-AF2

(3MP) H I E A S Y WiFi PT Dome Camera



- 3MP HD image for 360° Fullview
- Full-duplex 2-way voice real-time talk
- Cloud storage/128GB TF card storage
- WiFi hotspot
- Support RJ45 function
- Smart dual light night vision
- P6S Protocol for NVR connection
- ONVIF 2.4
- Accurate Human Detection and Tracking
- 3.5" Plastic housing
- IP66

With 0.5T computing power, it supports accurate human shape detection. The detection distance can reach 30 meters, and can detect 30 human shape targets at the same time. AI functions such as regional intrusion, cross-line detection, passenger flow statistics and fire detection can be expanded.

Support preset bit setting and call function, up to 6 preset. After the target tracking is completed, it can automatically return to the guard position and wait for the next tracking.

Support 20 kinds of voice broadcast + customization voice function, which can be used for greeting guests, garbage classification voice broadcast and alarm deterrence.

Support motion detection and human shape detection alarm functions, support alarm linkage to trigger email, trigger FTP, trigger SD card capture, support alarm to trigger SD card record, cloud record and audio-visual alarm.


APP supports 17 Chinese (Chinese Simplified/Chinese/Traditional/English/Finnish/Korean/French/Portuguese/Thai/Spanish/Polish/Indonesian/German/Italian/Russian/Japanese/Vietnamese/Arabic/Turkish).



# Specifications

GS-X56-RW3D-AF2	
<b>Camera</b>	
Model	GS-X56-RW3D-AF1
Main processor	Fulhan 0.5T computing power DSP
Operating system	Embedded LINUX operating system
<b>Video</b>	
Imaging devices	1/2.9 CMOS Sensor
Video encoding standards	H.264/H.265
System format	PAL 50HZ/NTSC 60HZ
Effective resolution	3MP(2304*1296)
Video frame rate	1-25fps
Video stream	256kbps-12288kbps (Default variable bit rate, Support customization) (APP)
Minimum illumination	Day mode 1 Lux,night mode0.01Lux
Day and night mode	Smart dual light/full color/Normal IR
AWB/3D-NR/AGC/DWDR/ Exposure	AUTO
Automatic Electronic Shutter (AES)	AUTO/ 1/25-1/10,000 Seconds
Video output	Easytool/EasyVMS client/Mobile APP client
Motion Detection	support
Capture function	support
<b>Audio</b>	
Encoding standard	G.711U
Audio input	/
Audio output	/
<b>Recording management</b>	
Recording mode	Whole day recording, alarm recording, timed recording,
Video saving	TFcard /PC side/NVR
Cloud storage	Huawei Cloud, 7days for free for new registrar
<b>Alarm</b>	
Smart AI detection	It supports precise human shape AI function, and can expand AI functions such as vehicle shape detection, fire detection and passenger flow statistics
Alarm output	Support alarm output, and linkage control of alarm equipment.
Alarm trigger	Motion detection alarm, human shape detection alarm, sound and light alarm, alarm video, capture, send email
Alarm voice	20 alarm voice options, supporting text to voice and app recording alarm voice functions
<b>Target tracking</b>	
Human tracking	Support accurate human shape tracking, support guard position setting, and return to the guard position after tracking you can return to the guard position
<b>Network</b>	
Network protocol	HTTP,TCP/IP,IPv4,UPNP,RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP,IP Search(Support P6S IP camera, DVR, NVS and etc.)
<b>Other</b>	
TF card capacity	Supports up to 128GB
WIFI	External 2.4G WIFI antenna
Operating voltage	DC 12V
Work environment	-10℃ --- +55℃
<b>General</b>	
Dimensions	120mm × 155.72mm × 244.26mm
Weight	Approximately 0.72kg
Carton Meas	
Carton Weight	Approximately kg

# Dimensions

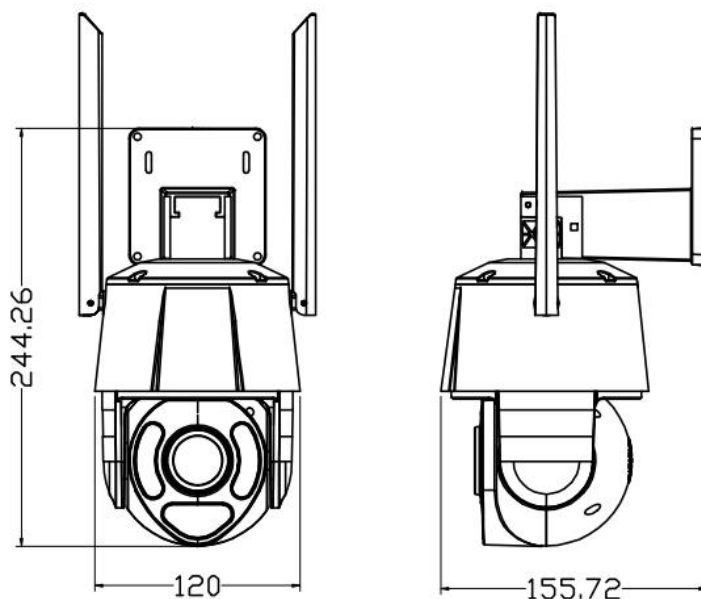

© SHENZHEN GRANDSECU TECHNOLOGY CO., LTD • All Rights Reserved • Specifications subject to change without notice.

Address: No.11 Xiantian Road, Xinsheng Community, Longgang District, Shenzhen, China 518116

Tel: +86-755-2851-0749 • E-Mail: [info@grandsecu.cn](mailto:info@grandsecu.cn) • Website: [www.grandsecu.cn](http://www.grandsecu.cn)

