

## HD564E-A0/K03

## 5MP Outdoor 4 in 1 Full color Bullet Camera



- 5MP High Performance CMOS
- Up to 2608\*1952 Resolution
- AHD/TVI/CVI/CVBS 4 in 1 Output
- 4 mm Lens
- 4PCS Warm LED
- Full color night vision
- Up-the-Coax (supports UTC)
- Supports 2D DNR/AWB/Exposure
- Metal+Plastic Housing
- IP66

The HD564E-AO/K03 5MP Outdoor 4 in 1 Full color Bullet Camera provides high definition analog output. AHD means that the analog signal can be sent over existing coaxial cable, eliminating the need to run new cables for high definition video.

4PCS Warm LED provides a good interface and good effective for night vision.

The 4 mm lens is optimized for viewing angles that fit any situation. D-WDR (Digital-Wide Dynamic Range) and 2D-DNR ensure that ideal images are in good conditions for both day and night vision.






















**Specifications** 

<u>specifications</u>	3
	HD564E-A0/K03
Camera	
Image Sensor	5.0 MP CMOS S01 K03
Signal System	PAL/NTSC
Effective Resolution	2608H*1952V
Frame Rate	5mp @ 12.5 fps/20 fps
Minimum Illumination	0.2lux, 0 lux with IR
Shutter Speed	AUTO/1/50 (1/60) -1/50,000sec
Lens	4 mm (2.8/6 mm optional)
Horizontal Field of View	82.6° (3.6 mm), 54.4° (6 mm)
Day/Night	Auto/color/BW (Black and White)
Angle Adjustment	Pan: 0° to 360°, Tilt: 0° to 90°, Rotate: 0° to 360°
WDR	D-WDR
Menu	
AGC	Supported
Day/Night Mode	Auto/Color/BW (Black and White)
White Balance	AUTO/MANUAL
Privacy Mask	0N/0FF, 8 programmable privacy masks
Motion Detection	4 programmable motion areas
Backlight Compensation	D-WDR/BLC/HLC/off
2D and 3D DNR	On/off
Voltage Detection	Supported
Scene	Indoor/outdoor/hard light/low light
Functions	Mirror, Defective pixel correction, Sharpness, Camera title
Interface	AND AND TO INVESTIGATION OF THE AND
Video Output General	1CH AHD/TVI/CVI/CVBS 4 in 1 Output
Operating Conditions	-4° F to 140° F (-20° C to 60° C), humidity, 90% or less (non-condensation)
Power Supply	-4 F to tab F (-20 C to do C), individuely, You of least (indirectination)
Power Consumption	IZY DC
IR Range	Up to 65 ft (20 m)
Protection Level	P66
Communication	Uo-the-Coax
Dimensions	176 Smm x 56 67 mm x 68 mm
Weight	Approximately 0.35 kg

## **Dimensions**

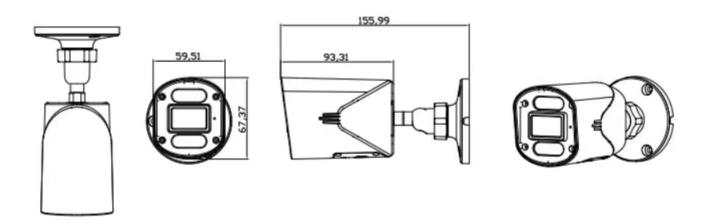

SHENZHEN GRANDSECU TECHNOLOGY CO., LTD · All Rights Reserved · Specifications subject to change without notice. Address: No.11 Xiantian Road, Xinsheng Community, Longgang District, Shenzhen, China 518116
Tel: +86-755-2851-0749 · E-Mail: info@grandsecu.cn · Website: www.grandsecu.cn

