

GS-3715-RH4P

5MP Indoor AI IPC POE Dome Camera



The GS-3715-RH4P 5MP Indoor AI IPC POE Dome Camera provides high definition analog output. It supports H.265+ video compression, which assures savings in bandwidth and storage.

15PCS Array IR provides a good interface and good effective for night vision.

The 3.6 mm and optional 2.8/6 mm lenses are optimized for viewing angles that fit any situation. D-WDR (Digital-Wide Dynamic Range) and 3D-DNR ensure that ideal images are in good conditions for both day and night vision.

- 5MP High Performance CMOS
- Up to 2880*1624 Resolution
- 3.6 mm Lens (2.8mm/6mm Optional)
- 15PCS Array IR
- ONVIF 2.4
- Multi-Platform Monitoring
- Supports 3D DNR/AWB/Exposure
- Smart colorful night vision
- Metal+Plastic Housing
- Support humanoid and vehicle detection
- Support POE
- IP66




Specifications

GS-3715-RH4P

Camera	
Image Sensor	5.0 MP CMOS 04D10
Signal System	PAL/NTSC
Effective Resolution	2880H*1624V
Minimum Illumination	0.1lux, 0 lux with IR
Shutter Speed	AUTO/ 1/25-1/10000sec
Lens	3.6mm (2.8/6 mm optional)
Horizontal Field of View	82.5° (3.6mm), 54.4° (6 mm)
Day/Night	Support D/N switching (IR-CUT optional)
Angle Adjustment	Pan/ Rotate:0° to 360°; Tilt: 0° to 75°
WDR	D-WDR
White balance	Support auto white balance
Image Enhancement	3N-DNR/D-WDR/BLC/HLC
General Function	Mirror, Privacy shelter, Human Detection, Voice recording, Restart
OSD	Support OSD setting, drag the position freely
Intelligent function	
Human detection	It supports human detection and can detect human shape for intelligent
Video	
Compression	H.264, H.265
Main stream	5MP(2880*1624)
Sub-stream	448P(800*448)
Frame rate	5MP 20fps, 4MP 25fps, 3MP 30fps
Video Adjustment	Brightness, saturation, chroma, contrast and sharpness adjustment
Network	
Ethernet	RJ-45 10M/100M self-adaption
Protocol	ONVIF, P2P, CGI, HTTP, TCP/IP, IPv4, RTSP, UDP, NTP, DHCP, DNS, IP
Access protocol	Support ONVIF/private protocol/CGI
User/Host	Up to 4 users
Client	IOS, Android, Windows
Interface	
Communication Interface	1-port RJ45 10M/100M self-adaptive Ethernet port
On-Board Storage	N/A
Reset Button	N/A
General	
Operating Conditions	-4° F to 140° F (-20° C to 60° C), humidity: 90% or less (non-condensation)
Power Supply	12V DC / POE 48V
Power Consumption	Maximum: 6 W
IR Range	Up to 65 ft (20 m)
Protection Leve	IP66
Communication	Up-the-Coax
Dimensions	Φ112.85 mm x 82.02 mm
Weight	Approximately 0.38kg
Finished product size/weight	120x120x100mm/0.44 kg
Outer box size/weight	620*250*510mm / 50PCS/ 22.98 kg

Dimensions

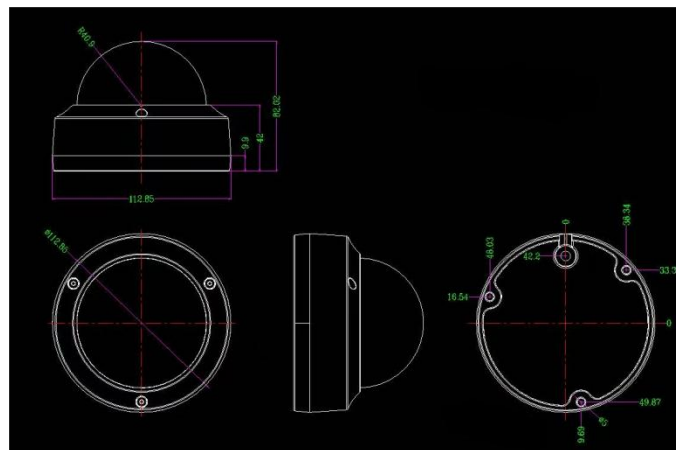

©SHENZHEN GENERAL TECHNOLOGY CO.,LTD • All Rights Reserved • Specifications subject to change without notice.

Address: No.11 Xiantian Road, Xincheng Community, Longgang District, Shenzhen, China 518116

Tel: +86-755-2899-2347 18823370246 • E-Mail: yueguohong@grandsecu.cn •

Website: www.grandsecu.com.cn

GRANDSECU®